


STAT-CLEAN

Anti-Static Cleaner For Standard Vinyl And Conductive Tile Floors

Stat-Clean is specifically designed for use in maintenance programs whose goal is to reduce static electricity build-up and increase the conductivity of surfaces in areas where sensitive electronic components are being used or manufactured. Regular cleaner and detergent compounds destroy the static dissipating properties of highly specialized conductive floor finishes like Stat-Coat, rendering static control maintenance programs ineffective. Stat-Clean removes dirt and soil while maintaining or increasing the conductivity of Stat-Coat, Stat-Buffer or Stat-Seal. This product is equally effective on vinyl, vinyl-asbestos, rubber, linoleum, ceramic, and concrete surfaces. Environmentally safe, it is non-corrosive, non-flammable, and biodegradable.

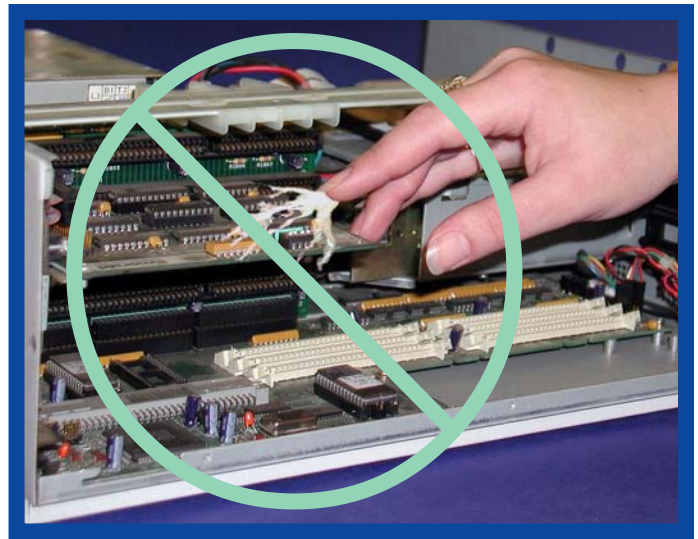

APPLICATION & MAINTENANCE

Floor Surfaces should be swept prior to washing to remove loose dirt and soil.

For use in daily or frequent damp mopping, use a dilute solution of 6 ounces of Stat-Clean per gallon of cold or warm water. Mop the floor lightly and allow it to dry. Do not rinse.

Stat Clean may also be diluted 6 ounces per gallon of cold or warm water and applied through an automatic scrubber equipped with a soft white pad.

For heavier soil conditions, sweep or vacuum the floor to remove loose soil or dirt. Dilute 8 - 16 ounces of cleaner per gallon of cold or warm water and use as a mopping solution. After cleaning, the floor may be spray buffed with Stat-Buffer or recoated with Stat-Coat. Do not use plain water or regular all purpose cleaners for maintaining static dissipative finishes.

SPECIFICATIONS

Active Ingredients	Anti-static and quaternary compounds
Electrostatic Decay Time	0.1 Seconds
pH	11 +/-0.5
Surface Resistivity:	10 ⁶ -10 ⁹ Ohms/M ² per ASTM D257 @ 100V
Free Ammonia	None
Free Alkali	None
Free Acid	None
Phosphates	None
Abrasives	None
Color	Light Green
Odor	Mild Detergent
Solubility in Water	100%
Freeze/Thaw Stability	Minimum 3 cycles
Shelf Life	1 year minimum
Flash Point	None
Weight Per Gallon	8.3
Biodegradable	Yes
Soil Suspension	Good

SAFETY INFORMATION

Health	1
Flammability	0
Reactivity	0
Personal Protection	B

CAUTION: May cause irritation in undiluted concentrations. If ingested, give vinegar, lemon or orange juice. Follow with olive oil. **Do Not Induce Vomiting.** If external contact, flood with water. In the event of eye contact, wash with plenty of clean water. **Contact a physician immediately.** Contains Diethylene Glycol Methyl Ether #111-77-3. For complete information consult MSDS sheet.



605 Springs Road, Bedford, MA 01730 USA
Tel: 978.667.5161, Fax: 978.670.5797
E-mail: Info@perma.com
www.perma.com